

Dimension list typ B-SF




d1	d2	d3	b1 ±0.2
4	10	2.2	2.5
4	10	2.2	3
4	12	2.2	2.5
4	12	2.2	3
4	16	2.2	2.5
4	16	2.2	3
5	10	2.2	2.5
5	10	3.2	3
6	14	3.2	2.5
6	14	4.2	3
6	16	4.2	2.5
6	16	4.2	3
6	22	4.2	3
7	16	5.2	2.5
7	16	5.2	3
8	14	6.2	2.5
8	14	6.2	3
8	16	6.2	2.5
8	16	6.2	3
8	18	6.2	3
8	22	6.2	3
8	24	6.2	3
10	18	8.2	3
10	22	8.2	3
10	24	8.2	3
10	26	8.2	3
11	17	9.2	4
11	22	9.2	4
12	16	10	3
12	20	10	3
12	22	10	3
12	24	10	3
12	26	10	3
12	28	10	3
12	30	10	3
12	32	10	3
14	20	12	3
14	24	12	3
14	28	12	3
14	35	12	3
15	21	13	3
15	23	13	3
15	24	13	3
15	25	13	3
15	26	13	3
15	30	13	3
15	32	13	3
15	35	13	3
15	42	13	3
16	25	14	3
16	28	14	3
16	30	14	3
16	35	14	3
17	23	15	3
17	25	15	3
17	28	15	3
17	30	15	3
17	32	15	3
17	35	15	3
17	40	15	3

d1	d2	d3	b1 ±0.2
18	26	16	3
18	28	16	3
18	30	16	3
18	32	16	3
18	35	16	3
18	40	16	3
20	28	18	3
20	30	18	3
20	32	18	3
20	35	18	3
20	37	18	3
20	40	18	3
20	47	18	3
20	52	18	3
22	30	20	3
22	30	20	3
22	32	20	3
22	35	20	3
22	40	20	3
22	47	20	3
24	40	22	3
24	47	22	3
25	34	23	3
25	35	23	3
25	40	23	3
25	42	23	3
25	45	23	3
25	47	23	3
25	52	23	2.5
25	52	23	3
26	36	24	3
26	37	24	3
26	42	24	3
28	35	26	3
28	37	26	3
28	38	26	3
28	40	26	3
28	45	26	3
28	47	26	3
28	52	26	4
30	36	25	3
30	36	28	3
30	38	28	3
30	40	28	3
30	42	28	3
30	45	28	3
30	47	28	3
30	50	28	4
30	52	28	4
30	55	28	4
30	62	28	4
32	42	30	3
32	42	30	3
32	45	30	3
32	47	30	3
32	50	30	4
32	52	30	4
33	40	31	3
33	45	31	3
33	52	31	4

d1	d2	d3	b1 ±0.2
34	50	32	4
35	42	33	3
35	45	33	3
35	47	33	3
35	50	33	4
35	52	33	3
35	52	33	4
35	52	33	5
35	55	33	4
35	62	33	5
36	47	34	3
36	52	34	4
37	45	35	3
38	50	36	4
38	52	36	4
38	55	36	4
38	62	36	4
40	50	38	4
40	52	38	4
40	55	38	4
40	55	38	6
40	60	38	5
40	62	38	5
40	72	38	4
42	55	40	4
42	60	40	4
42	62	40	4
42	65	40	4
42	72	40	4
45	52	43	4
45	55	43	4
45	55	43	4
45	55	43	5
45	60	43	4
45	62	43	4
45	65	43	4
45	72	43	4
45	75	43	4
45	80	43	4
45	85	43	4
48	62	46	4
48	72	46	4
50	60	43	3
50	60	47	4
50	60	47	5
50	62	47	4
50	68	47	4
50	68	47	5
50	70	47	4
50	72	47	4
50	80	47	4
50	90	47	4
52	68	49	4
52	72	49	4
52	80	49	4
55	70	52	4
55	72	52	4
55	72	52	5
55	75	52	4
55	80	52	4

d1	d2	d3	b1 ±0.2
60	85	57	4
60	90	57	4
62	80	59	4
62	80	59	4
62	90	59	4
63	73	60	4
65	80	62	4
56	70	53	4
56	72	53	4
56	80	53	4
58	72	55	4
58	80	55	4
60	72	57	4
60	75	57	4
60	78	57	4
60	80	57	4
65	85	62	4
65	85	62	5
65	90	62	4
65	100	62	4
68	78	65	4
68	80	65	4
68	80	65	5
68	90	65	4
68	100	65	4
70	78	67	4
70	78	67	5
70	80	67	4
70	80	67	5
70	85	67	4
70	85	67	5
70	90	67	4
70	95	67	4
70	100	67	4
70	110	67	4
70	100	67	4
72	95	69	4
72	100	59	4
75	90	72	4
75	95	72	4
75	100	72	4
75	100	72	5
80	90	77	4
80	90	77	5
80	95	77	4
80	100	77	4
80	100	77	4
80	102	77	4
80	105	77	4
80	110	77	4
85	105	82	4
85	110	82	4
85	110	82	5
85	120	82	5
90	110	87	4
90	110	87	5
90	115	87	5
90	120	87	5
95	110	87	4
95	110	92	5

d1	d2	d3	b1 ±0.2
95	115	92	5
95	120	92	5
95	125	92	5
100	115	97	6
100	120	97	5
100	125	97	5
100	130	97	5
100	140	97	5
105	125	102	4
105	130	102	5
105	140	102	4
110	125	107	4
110	130	107	5
110	140	107	5
115	130	112	5
115	140	112	5
115	150	112	5
120	140	117	5
120	150	117	5
120	160	117	6
125	150	121	5
125	150	121	7
125	160	121	6
130	160	126	5
130	170	126	5
135	160	131	5
135	170	131	5
140	160	136	5
140	170	136	5
150	170	146	6
150	180	146	6
160	180	156	6
160	190	156	6
170	200	166	6
180	200	176	6
180	210	176	6
180	220	176	6
190	215	186	6
190	220	186	6
200	230	196	6
210	230	206	6
210	240	206	6
220	250	216	6
230	260	226	6
240	270	236	6
250	280	246	6
260	300	255	6
270	310	265	6
280	320	275	6
300	340	295	8
320	360	315	8
340	380	335	8
360	400	355	8
380	420	375	8

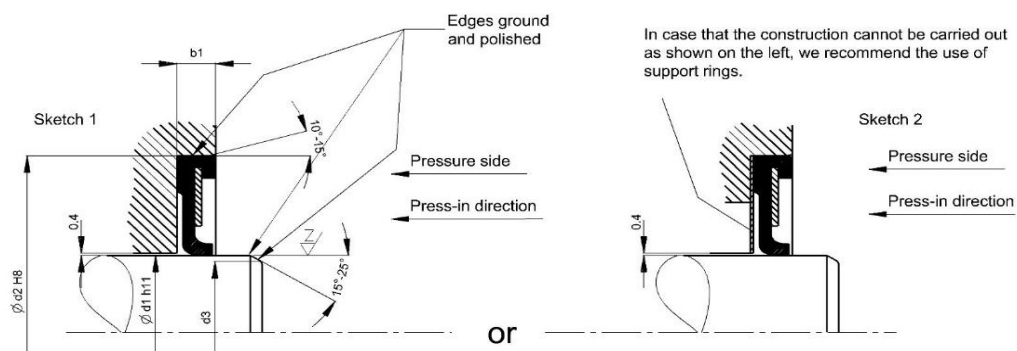


For pressure application on the pressure side, the seal has to be supported as shown in sketch 1 or 2.

Order Key type B-SF

Example

B-SF 25 x 40 x 3 FPM-V2/



- Material of support ring
- Material of collar
- Width b1
- Bore diameter d2
- shaft diameter d1
- Radial shaft seal type